



The experts for smart home products,
KNX building systems technology and much more.

VALUE

Best Price-Quality / Functionality Ratio.
Highest cost-performance in the market.

SERVICE

Fast and decisive Technical support service.
Possibility to provide OEM solutions.
Customization of our products,
materials or design on customers request.



珠海世讯科技有限公司
Zhuhai Sation Technology Co.,Ltd.
Tel:+86-756-3628187/287/387
Fax:+86-756-2612730
Web:www.sation.com.cn Email:esme@sation.com.cn
3F-2 Blog B1,No.1 Software Road,Zhuhai Hi-tech Zone,Zhuhai,Guangdong,China 519000
中国广东省珠海市高新技术开发区南方软件园B1栋3层


Zhuhai Sation Technology Co.,Ltd.

The first Chinese company that had a KNX protocol stack


BRAND INTRODUCTION

Sation manufactures and promotes various KNX functional modules and system components for smart building/home applications. We are Chinese enterprise which owns the intelligent building KNX core protocol software standard, Sation technology is focused on research and innovation in building efficiency, intelligence and energy-savings. Through the dedication to technical innovation and continued improvement, Sation technology has obtained various software copyrights, both at home and abroad, including over 10 patent intellectual property rights and over 20 software copyrights.


Home Automation Solution

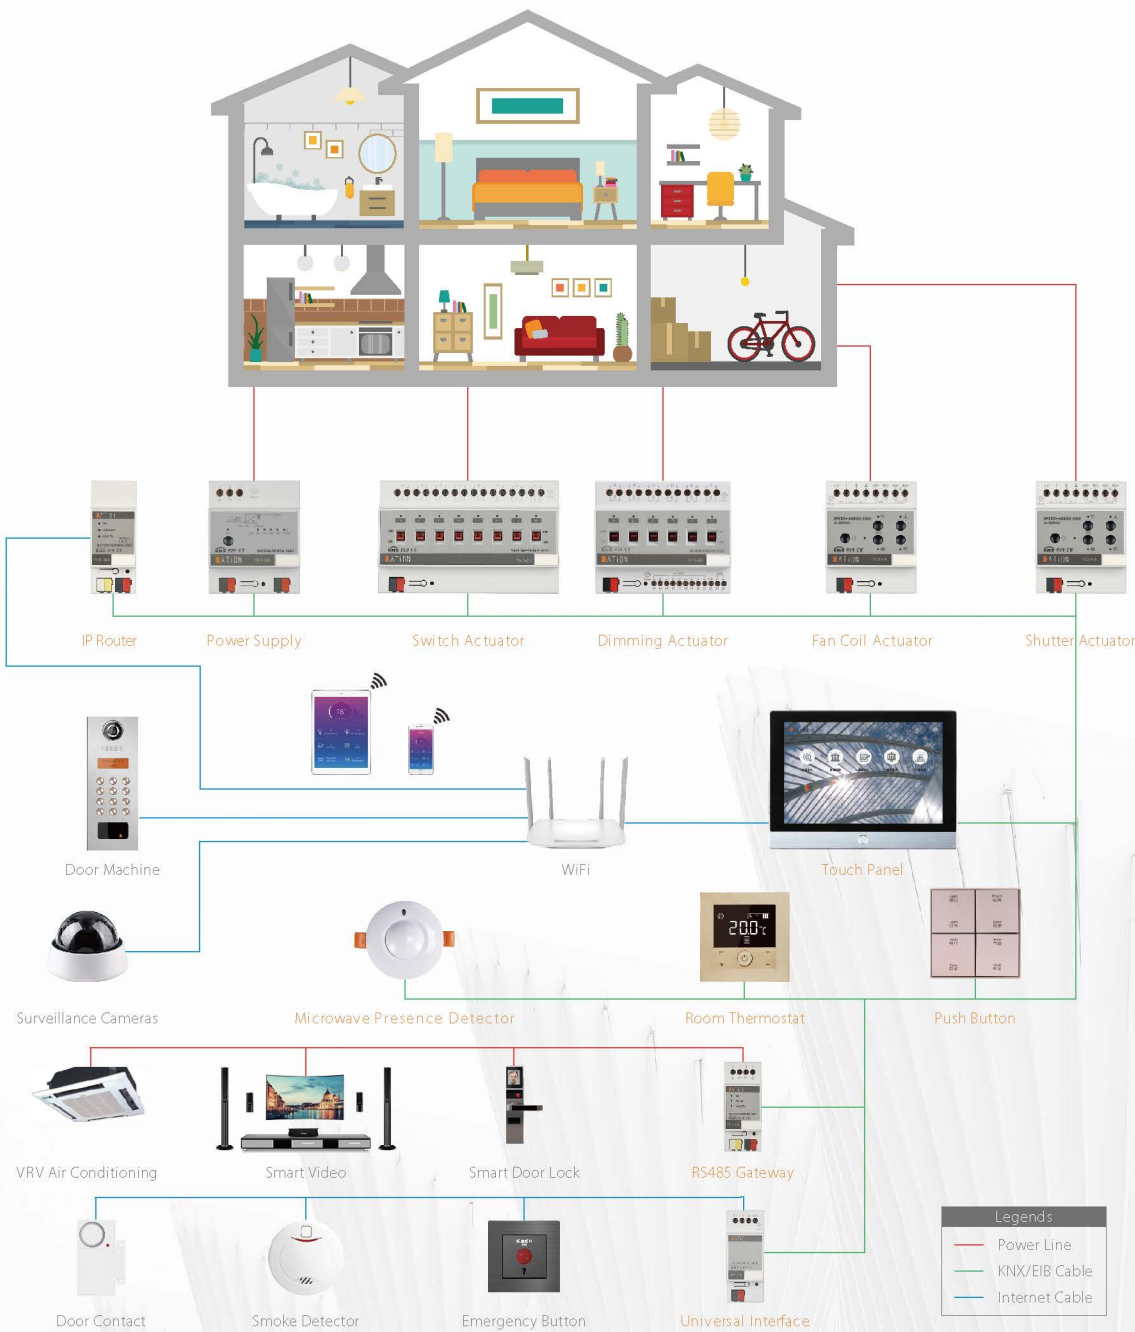

Hotel Automation Solution

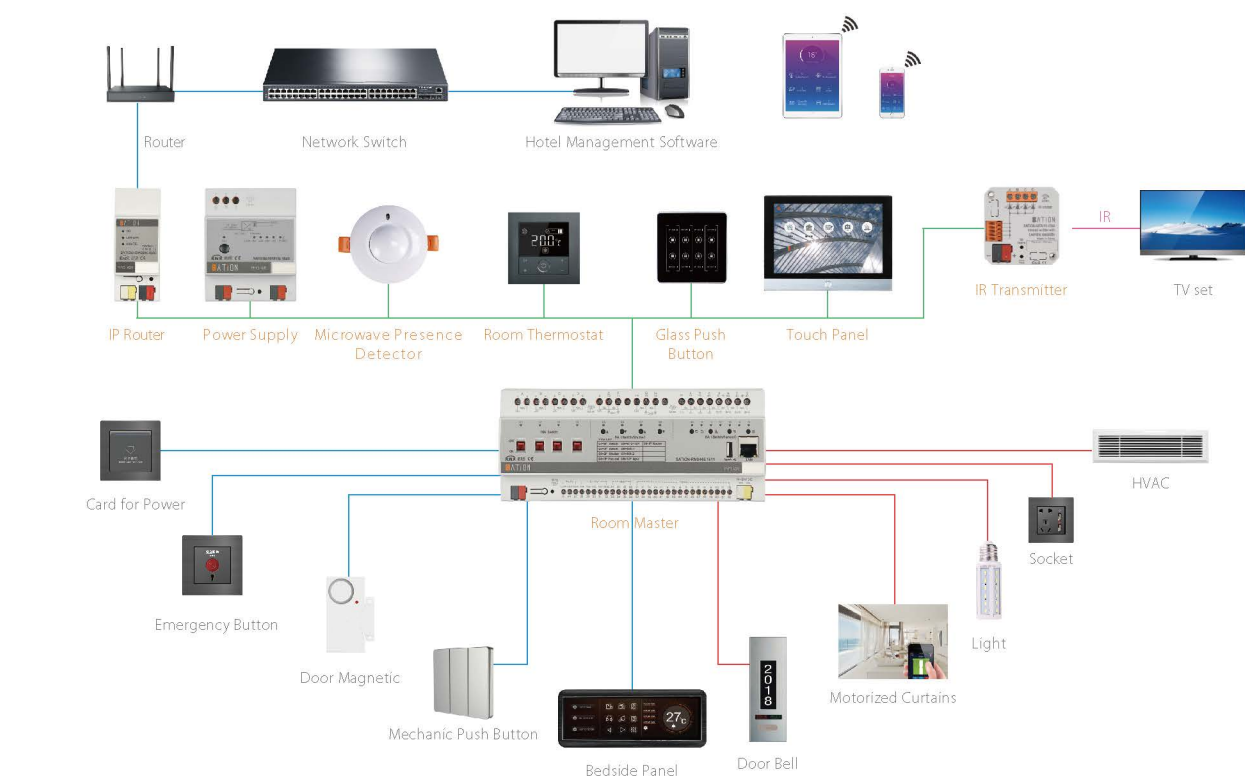

Office Automation Solution

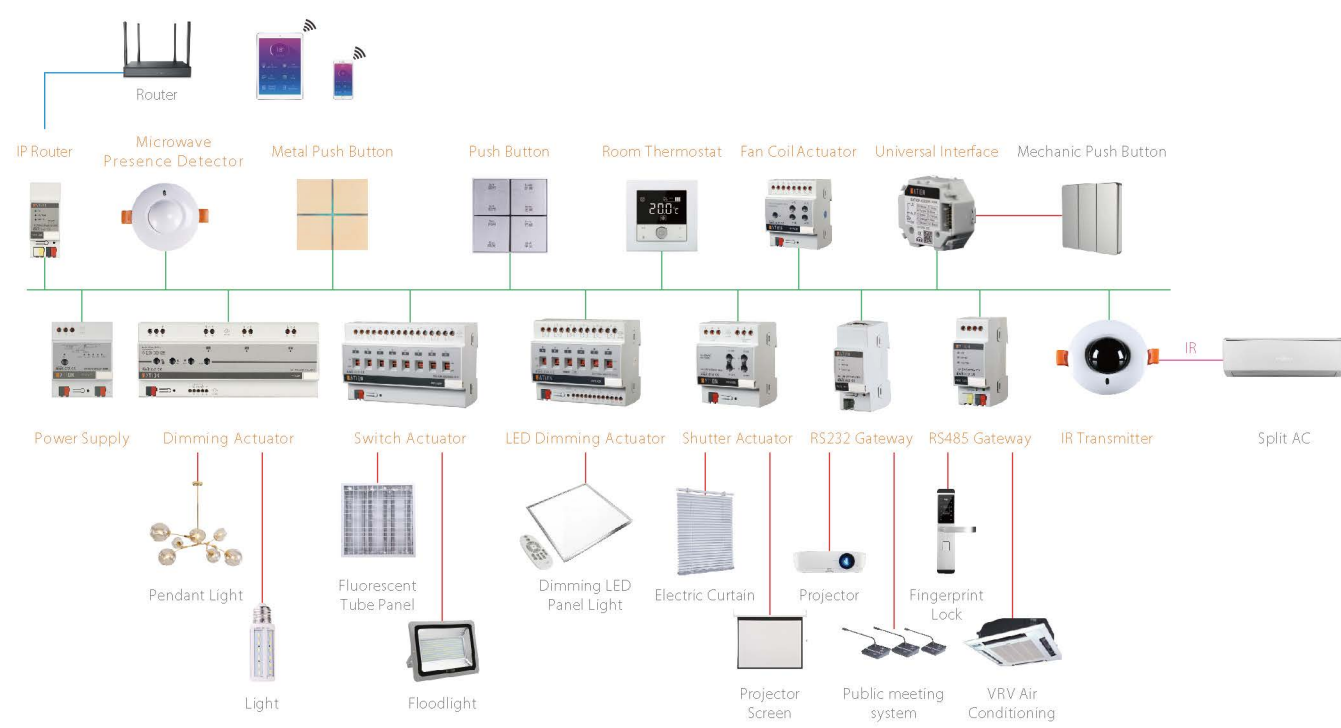

DALI GATEWAY

SATION-GW2303.0401
SATION-GW2304.0401

72x90x63mm




- Support 16 scenes, scene number can be set separately; each scene A, B channel total 128 devices can be set separately;
- General control: support setting the brightness value of the lamp; support setting the switch time, absolute dimming time and relative dimming time separately;
- Operation mode: normal mode, dynamic mode, slave mode;
- Short address assignment: automatic assignment, manual assignment and address deletion;
- 64 channels of A channel can be individually dimmed and controlled, and 64 channels of B channel can be used for general control; (single channel gateway)
- Individual dimming control and status feedback for 128 devices in A and B channels; (dual-channel gateway)
- Support DT8 device type,Support colour control (Colour control gateway)

MICROWAVE/PIR PRESENCE DETECTOR
CONSTANT LIGHT CONTROL

SATION-SS3004.0101
SATION-SS3004.0102

Dimension:92x53x68mm
Install:55x55mm

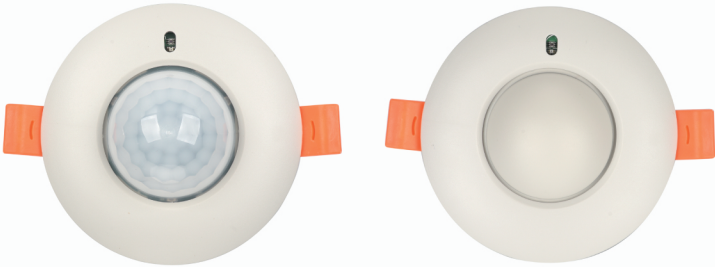


- Range of detection illuminance : 0.11ux~6600lux
- 1-10 level sensitivity of motion detecte
- Flush mounted
- Motion detection angle H 360°, covered area 6-12m Ø
- Adjustable presence and presence sensitivity for day, night and alarm
- Detection of moving directionaster/slave function, scenes and logical functions
- Manual/automatic/semi-automatic modeit
- Day/night function, orientation light function
- Orientation light (brightness and time adjustable)
- Sensitivity separately adjustable for day/night/presence

SWITCH/SHUTTER/DIMMING ACTUATOR

SATION-WD0201.0851
SATION-SW0003.0851
SATION-DM0101.0210

52x50x22mm

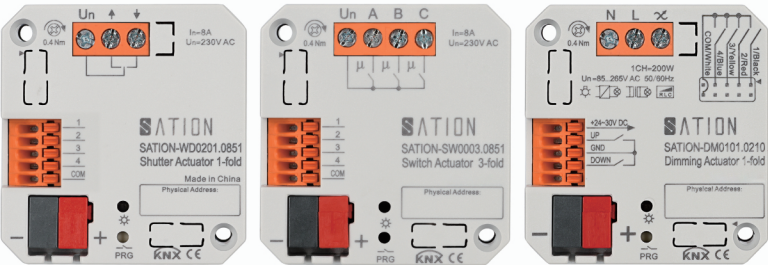

- 8A, HF relays, no hand switch
- Extensive staircase light and impulse functions
- Logical linking of binary data
- Adjustable behavior in case of bus voltage failure or return
- Time functions (switch-on/switch-off delay)
- Status response (active/passive) for each channel
- Extendend scene functions for each channel
- Integrated Universal Interface 4-fold

ROOM THERMOSTAT

SATION-PM1421.1111
SATION-PM1421.2111

86x86x40mm
172x86x40mm



- LCD Display Programmable Room Thermostat
- Dimming/Switching/shutter control
- Push Button + Room Thermostat
- Scenes Function

PRODUCT DESCRIPTION

Multi-function panel



TOP MULTI-FACETED BORDER, RICH MATERIAL AND COLOR SELECTION



Push Button

- Dimming/Switching/Shutters control/Scens functions
- Centered title block with cover for individual marking
- Push Buttons can be parameterized for 1 or 2 button operation programmable length of button push
- Forced setting function for each output
- Operation with short/long button push and 2 objects
- To replace conventional push buttons
- Color : black/silver/champagne gold/grey black/brown,etc.
- All aluminium alloy Color are anodized


Metal Touch Panel

- Dimming/Switching/Shutter control/Scens functions
- Suitable for concealed wall switch with 80\86 bottom case
- Indicator lights are blue/green/yellow
- Color is optional for gold/black/white/silver/grey

CUTTING-EDGE QUALITY FROM EUROPE

FLEXIBLE products in the switch series, mobile sensors and other products are advanced technology and design as a solid foundation. Just glance at it, you can feel the essence of FLEXIBLE new design concept: that is the pursuit of the most simple style. Stream-lined design, rich connotation. Form and function elements are integrated with each other to build a whole.

GUEST ROOM CONTROL UNIT

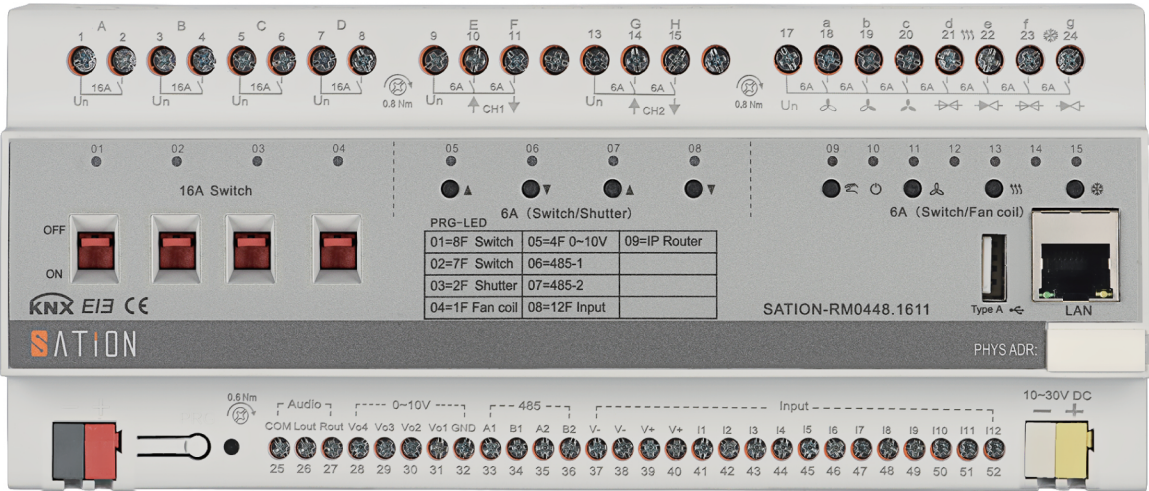

x6 LED Dimming Actuator

- Global and individual dimming speeds
- Parallel operation of 6 channels
- 8 scenes per channel
- Automatic time-dependent dimming
- Day/night function dimmer
- Unlimited power
- Live wire protection

x2 Shutter Actuator

- Status response (active/passive) for each channel
- Operation mode blind/shutter adjustable
- Absolute positioning for shutter and blinds
- Manual operation and LED indicator for each channel
- Operation mode blind/shutter Time control function
- Separate travel time for up and down adjustable
- Adjustable behavior in case of bus voltage failure or return
- Reverse direction protection

x12 Universal Interfaces

- Independent / Combined input function
- To connect pushbuttons or window/auxiliary contacts
- Adjustable debounce time for long keystroke
- Blocking function for each channel
- Operation with the short/long button push
- 12 Channels dry contact input

x4 Heating Outputs

- Two possibilities to control the heating valve
- Control two types of valve
- Locking function
- An automatic valve protection function

Background Music

- The user can download the MP3 audio file from the USB drive,
- Connect the USB port device can play the music
- The left and right channels can be directly connected to an 8 ohm /10W speaker

x2 RS485 Gateway

- Connected RS485 interface equipment
- Converting of data between KNX and Modbus
- Up to 17000 group address
- Scene function

x15 Switch Actuator


- Dimming/Switching/Shutters control/Scens functions
- Manual emergency switch 4 fold
- Current measurement range 20A 4 fold
- Two logic objects per channel
- Time functions (switch-on/off delay, Staircase light function)
- Status response (active/passive) for each channel

x1 IP Router



- To enable communication between LAN and the KNX bus
- 4 simultaneous connections possible
- Programming the KNX bus via TCP/IP
- Other building control software can realizing data interaction and control by connecting this equipment between ethernet and KNX net
- Complete Ethernet and line coupling, message exchange
- Automatically aware and set the network baud rate (10/100mb)
- Filtering, blocking and routing of group message

x1 FanCoil 4 Pipes


- Control of 3-speed fans/ventilator convectors
- 5A Suitable for 2-pipe/ 3-pipe systems and 4-pipe systems
- Control or automatic control of fans and valves, Status value query reply;
- Support bus voltage disconnect and recovery relay switch position selection, etc.
- Output objects to control valves for heating/cooling
- Day/Night function to limit fan speed at night

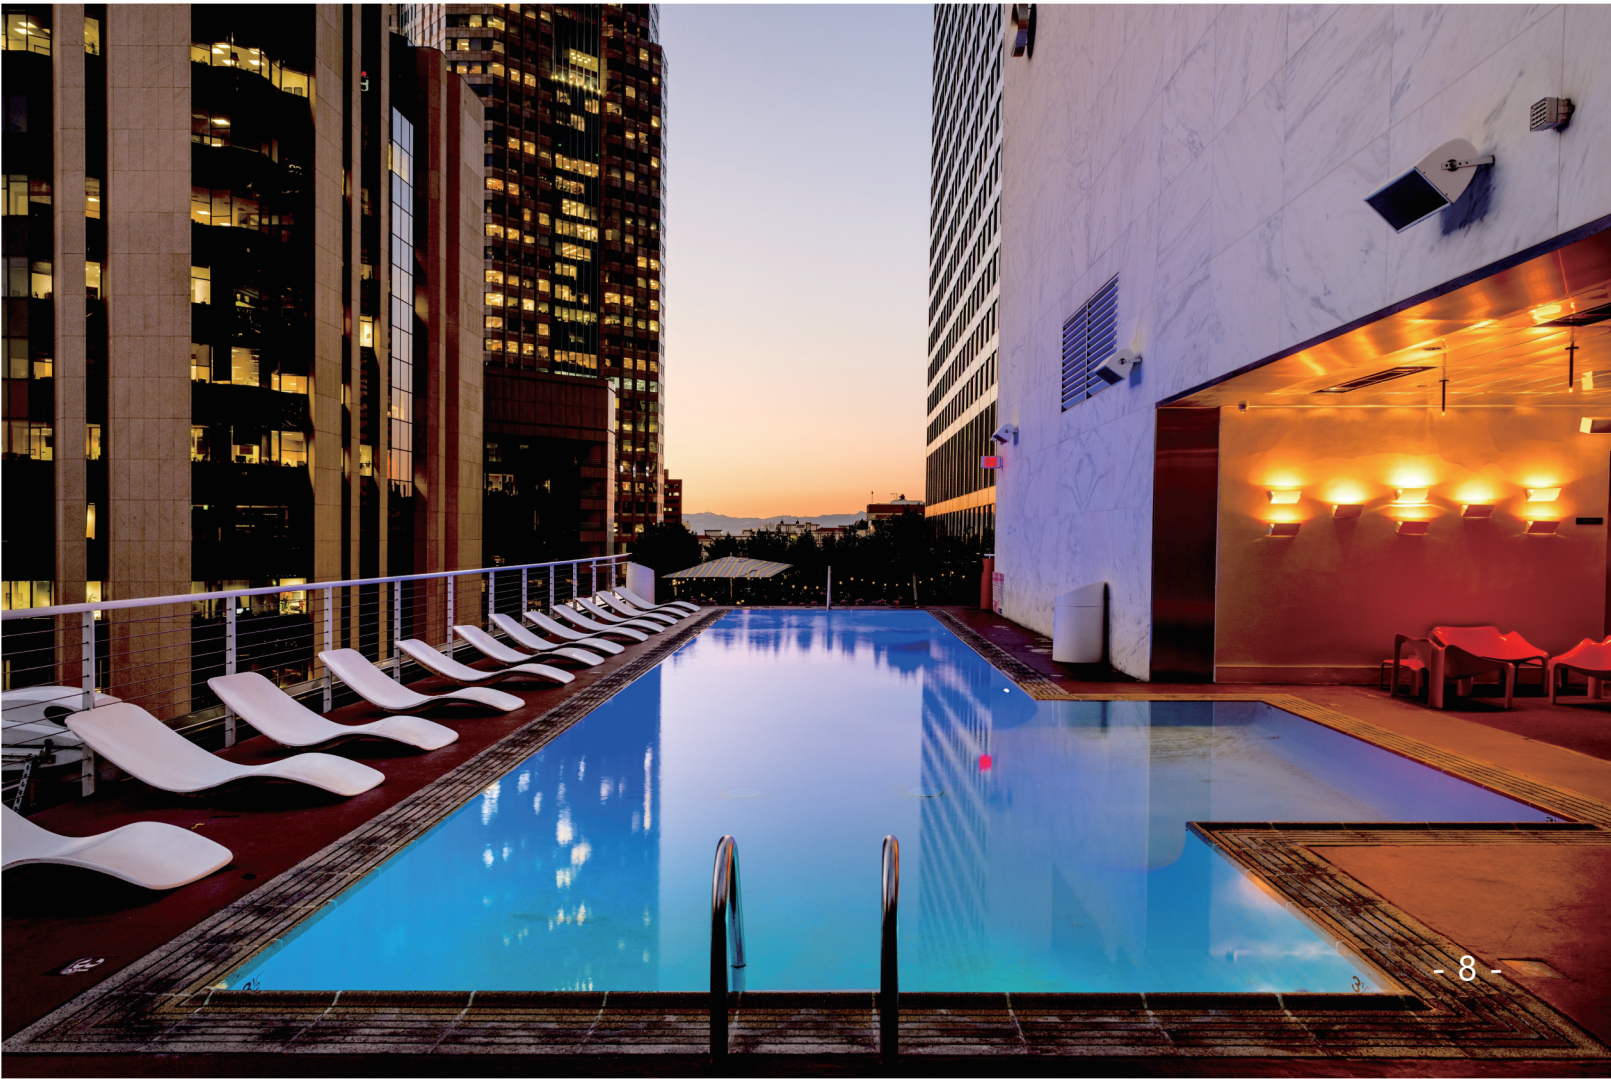

PRODUCT LIST

Picture	Name/Model	Dimension	Function
	Push Button 8-fold SATION-PM1580.0101 SATION-PM1580.0102 SATION-PM1580.0103 SATION-PM1580.0104 SATION-PM1580.0105 SATION-PM1580.0106	86x86x9mm	
	Push Button 8-fold SATION-PM1580.0111 SATION-PM1580.0112 SATION-PM1580.0113 SATION-PM1580.0114 SATION-PM1580.0115 SATION-PM1580.0116		Dimming Function:press long/short to dimming. Stutters Control: press long (move/stop), press short (stop/move) Switching Function:edge control, press long/short to control,edge reversal Scens Function:memory function,selection of different scense One button dimming:short press button to switching ,long press button to dimming. Sending of an second objects is possible by the logical modules Operation of blinds and shutters, 1 and 2 button operation Centered title block with cover for individual marking Push Buttons can be parameterized for 1 or 2 button operation NO or NC contact operation, programmable length of button push Forced setting function for each output Operation with short/long button push and 2 objects (black、sliver、champagne、grayish black、brown、etc)
	Push Button 4-fold SATION-PM1704.0006 SATION-PM1704.0016 SATION-PM1704.0021 SATION-PM1704.022		
	Push Button 8-fold SATION-PM1308.0216 SATION-PM1308.0217 SATION-PM1308.0218		

PRODUCT LIST

Picture	Name/Model	Dimension	Function
	4\" data-bbox="633 211 692 259"/>	4\" data-bbox="724 231 744 239"/>	.Turn on or off the central control host:Turn on the power supply automatically. .Control Equipment:Real-time control of KNX device can be realized by connecting KNX device with central control host through EIB bus or ethernet. .System dormancy and awakening:When the system wakes up for a long time (default is 1 minute), it does not touch the screen, and the system goes to sleep with a breathing screen. Systematic dormancy in state, press the HOME key to wake up the system and light the screen. .Restart the central control host:When the system is awakened, the central control host can be restarted by pressing HOME key for more than 6 seconds. .Timely restart:Automatically restart time of central control host with arbitrary configuration.
	10.1\" data-bbox="633 421 692 445"/>	10.1\" data-bbox="720 431 748 439"/>	<ul style="list-style-type: none">• Turn on or off the central control host:Turn on the power supply automatically.• Control Equipment:Real-time control of KNX device can be realized by connecting KNX device with central control host through EIB bus or ethernet.• System dormancy and awakening:When the system wakes up for a long time (default is 1 minute), it does not touch the screen, and the system goes to sleep with a breathing screen•Systematic dormancy in state, press the HOME key to wake up the system and light the screen.• Restart the central control host:When the system is awakened, the central control host can be restarted by pressing HOME key for more than 6 seconds.• Timely restart:Automatically restart time of central control host with arbitrary configuration
	Fan Coil Room Thermostat SATION-PM1423.1239	86x86x9mm	<ul style="list-style-type: none">• Temperature and relative humidity can be measured by internal integrated sensors, and can also be received by external bus.Temperature value measured by the unit.It can display the measurement value of temperature,setting value and relative humidity.Temperature display can be switched at C / F .• Room temperature control can be switched or proportional (PWM or continuous) adjustment.• Seasonal mode: heating and cooling can be switched locally or through bus.• Fan-coil units connected by 2-pipe or 4-pipe can be manually or automatically controlled.• Delay shutdown function.• With its own control relay, it can directly connect the fan coil unit.• Equipped with a set of two key button functions, can be configured to switch, dimming, curtain and scene functions.
	Metal Touch Panel 4-fold SATION-PT1014.2632 SATION-PT1014.2638 SATION-PT1014.2631	86x86x35mm	Channel grouped function: ——Dimming:edge switch, short/long keystroke dimming. ——Shutters: The short keystroke (Stop/Blinds Adjustment), The long keystroke (Shutter Down/up) ——Switch:edge control Channel unique function ——Switch: edge control, short/long keystroke control,edge reversal. ——Scene:Saving function,select different scene ——One Button Dimming: The long keystroke addresses the communication object Dimming on/off. ——One Button Shutter: The long keystroke performs up- and down- movement of the shutter.

PRODUCT LIST

Picture	Name/Model	Dimension	Function
	Switch Actuator 1/4/6/8/12-fold 16/20A	36x90x63mm 72x90x63mm 108x90x63mm 144x90x63mm 216x90x63mm	<ul style="list-style-type: none">• Current measurement range 10mA-20A• Each channel can be controlled independently and has an own supply phase• Time functions (switch-on/off delay, Staircase light function)• Status response (active/passive) for each channel• Logical linking of binary data, 8 scenes per channel• Central switching functions and block functions• Adjustable behaviour in case of bus voltage failure or return• Integrated True RMS current measurement (current, kW)• Time meter / Integrated counter to capture power consumption (Wh/kWh)
	Switch Actuator 2/4/6/8/12-fold 10A		
	LED Dimming Actuator 6-fold 0-10V	144x90x63mm	<ul style="list-style-type: none">• Global and individual dimming speeds• Repetition of sequences for automatic color control• Parallel operation of 2 channels• Automatic color temperature control Dim2Warm• Automatic time-dependent dimming• Day/night functions MOS dimmer• Overcurrent and overtemperature supervisions
	Shutter Actuator 2/4-fold	72x90x63mm 144x90x63mm	<ul style="list-style-type: none">• Status response (active/passive) for each channel• 8Bit positioning for shutter and blinds• Lockable manual operation and LED indicator for each channel• Operation mode blind/shutter• Time control function• Separate travel time for up and down• Adjustable behavior in case of bus voltage failure or return
	Fan Coil Actuator	72x90x63mm	<ul style="list-style-type: none">• Control of 3-speed fans/ventilator convectors• 10A Suitable for 2-pipe/ 3-pipe systems and 4-pipe systems• Output objects to control valves for heating/cooling• Day/Night functions to limit fan speed at night• Control or automatic control of fans and valves, Status value query reply• Support bus voltage disconnect and recovery relay switch position selection, etc.

PRODUCT LIST

Picture	Name/Model	Dimension	Function
	KNX Shutter Motor SATION-WD0211.1216	282x45x45mm	<ul style="list-style-type: none">• Shutter control function: control the clockwise or counterclockwise operation and stop;• Button function: it can be connected with push button• Press the shutter to open or close;• Travel setting: through time allocation;• Position state feedback: percentage position feedback;• Absolute position setting: the shutter can reach the designated position through ETS;• Reset function;• Manual operation and safety insurance function;• Traction trigger function;• Bottom reversal function;
	Power Supply Choke 2U/320mA SATION-SP2003.3222	36x90x63mm	<ul style="list-style-type: none">• Rated 320mA/640 mA (the total current of the two outputs);• 64 or less equipments configure 1 bus supply, specific quantity depends on total equipment consumption;• A KNX supply need to be paralled every 500 meter if line loss or voltage drop.• In-page and out-page supply need to be configured independently if using coupler paging.
	Bus Power supply 4U/640mA (universal power input power level indication) SATION-SP2004.6440	72x90x63mm	<ul style="list-style-type: none">• Failure message by a telegram,Short-circuit-proof Overload safe,With additionally choke free output Integrated bus coupling unit with diagnosis function:Bus voltage, bus current, bus overload, Bus voltage failure/return• All events are stored with time stamp in a ring buffer
	Dimming Actuator 1/2/3/6-fold 200/600W	72x90x63mm 144x90x63mm 216x90x63mm	<ul style="list-style-type: none">• Relative dimming/absolute dimming functions• Switch-on /off delay• Set the dimming time from 0% to 100%• Set illumination value, switch on and switch off speed• Automatic color temperature control Dim2Warm• Day/night functions• Overcurrent and overtemperature supervisions• MOS dimmer Scens Function
	Dimming Actuator 3-Fold 0-10V SATION-DM0103.0030	52x50x22mm	Used for brightness adjustment and switch control of LED lamps. With relative / absolute dimming mode, 0% ~ 100% dimming time can be set, on / off speed brightness value setting, scene function, delay on / off and other functions

PRODUCT LIST

Picture	Name/Model	Dimension	Function
	Line Coupler USB Interface	36x90x63mm	<ul style="list-style-type: none">• Connection - EIB/KNX bus terminals (0.8mm in diameter)• Line Coupler to connect two KNX lines to each other• Electrical isolation between the lines• Separate bus power supply for each line• Filter functions to reduce bus load• Support extended group addresses• To enable communication between PC and the KNX bus via USB• Full compatible to ETS3/4/5
	USB Interface SATION-GP2402.0201	36x90x63mm	<ul style="list-style-type: none">• To enable communication between PC and the KNX bus via USB• Fully compatible to ETS3/4/5
	RS485 Gateway SATION-GW2302.0201	36x90x63mm	<ul style="list-style-type: none">• To enable communication between PC and the KNX bus TCP/IP• Programming the KNX bus via TCP/IP• Power supply by KNX bus,no external bus power supply is required• Enrryped transmission at sending emails
	RS232 Gateway SATION-GW2301.0201		<ul style="list-style-type: none">• Other building control software can realize data interaction and control by connecting this equipment to ethernet and KNX net• Connect 485/232 interface equipment• Convert of data point types
	IP Router SATION-GW2300.0201		<ul style="list-style-type: none">• This product provides 6 SOCKET channels and supports 10/100M paired ethernet access• Also the KNX package can control ethernet by using this product ,such as: 1)the control system requires ethernet and PC background to manage the software; 2) Other building control softwar can realize data interaction and control by connecting this equipment to ethernet and KNX net.

PRODUCT LIST

Picture	Name/Model	Dimension	Function
	Universal Interface 6-fold	48x41.5x19mm	<ul style="list-style-type: none">• Dimming on/off• Switches on/off• Shutter down/up• Switch edge control/switching sequence• Scene function select different scene• Operation with short/long button push and 2 objects• Counting of pulses• Forced setting function for each output• LED output control
	Universal Interface 3-fold	36x90x63mm	
	Infrared Emitter (Flush mounted) SATION-GP2410.0304	52x50x22mm	<ol style="list-style-type: none">1.Connect traditional infrared equipment into KNX smart systems,and realized by KNX smart pannel,IP or other KNX equipment.2.Integrated infrared internal learning receiver,user unnecessary connected outside. It can reasized learnig and transmit function,Un-necessary other debugging tools.3.learning any type of infrared signal whose carrier frequency is 38KHz. After successful learning,it Has feedback information and can store 225 different codes.4.Integrates part of the air conditioning remote control code,and the other infrared devices such as TV, set-up box can be controlled by learning function.
	IR Transmitter	Exterior: 92x53x68mm Hole: 55x55mm 52x50x22mm	<ul style="list-style-type: none">• Storing up to 64 different IR functional control codes for per channel• Twilight/brightness channel with switching thresholds• Temperature channel with three switching thresholds• Ten logic functions• A channel can link up to 16 group addresses• IR functional control codes can be assigned to 1bit or 1byte type of object• Sending time and sending delay can be set for per control codes• Each main function can include 5 slave functions• The transmitting angle is full of direction
	Outside Light Sensor SATION-SS3020.0201	92x53x68mm	<ul style="list-style-type: none">• Supports the output function of temperature value, the value can be sent periodically;• Support illumination value output function, the value can be sent periodically;• Supports the setting function of critical illumination value for load operation;• Support illumination value change output switch function;• Illuminance values can be calibrated externally or internally.